

X Y Hoist system – CP XY 1*


- Can pick up a client from the floor
- Powerful motors for smooth operation (hoist 24v DC, traverse 24v DC) with overload restrictor
- Heavy duty rechargeable batteries (2x12v DC) 7.0AH with LED charge indicator
- Over-speed safety governor
- Built in safety stops Pneumatic handset with up/down, traverse and emergency lowering and power cut off functions
- Emergency manual raise and lowering

TECHNICAL SPECIFICATION


Hoist Motor	24V DC
Traverse Motor	24V DC
+ System Traverse Motor	24V DC
Weight Unladen Hoist (Powered)	22.3Kg
Weight unladen Hoist (Manual)	21.9Kg
Weight of Carrybar	2Kg
Shipping Box Dimensions	510mm x 500mm x 500mm
Shipping Box Weight (Powered)	31Kg
Shipping Box Weight (Manual)	28Kg
Voltage	24V D.C.
Fuse Rating	3amp max.
Batteries	2 off 12V 7amp sealed – rechargeable
Transformer Input	240V A.C. 50Hz
Transformer Output	33V A.C.
Approximate Charging Time	4 Hours



Range for the **transactive™** Overhead Track Hoist with the Carrybar at its Highest Point

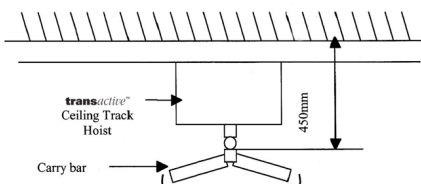

Range for the **transactive™** Overhead Track Hoist with the Carrybar at its Lowest Point

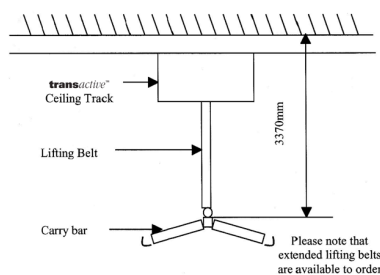

*The above information is for illustration purposes only. Product supplied may differ although specification remains.